

# TRAIL XQ50

Thermal Sights





## Reticle Catalogue

### Notice

The values of the reticles indicated in this catalogue are correct in the following cases:



- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

# D50i

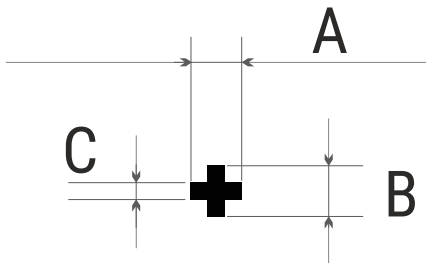



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |

# H50i

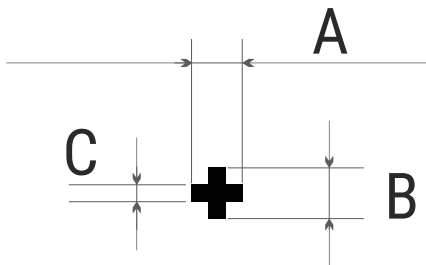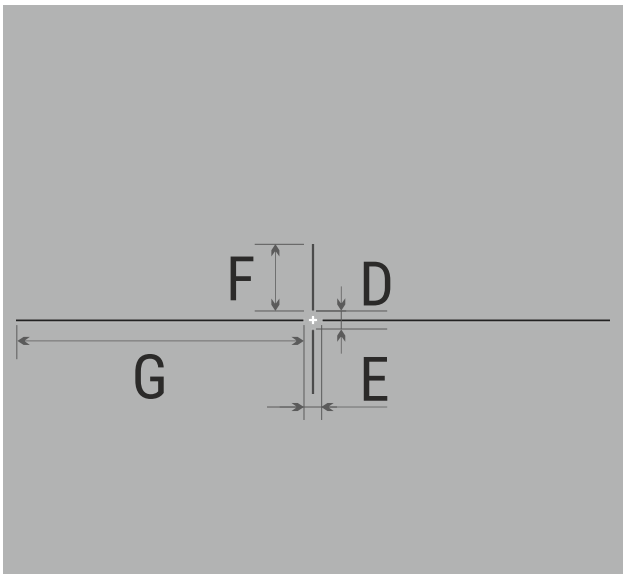



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 4.9 / 14.3       |
| Section E          | 4.9 / 14.3       |
| Section F          | 18.2 / 52.9      |
| Section G          | 78.4 / 228       |

# M50i

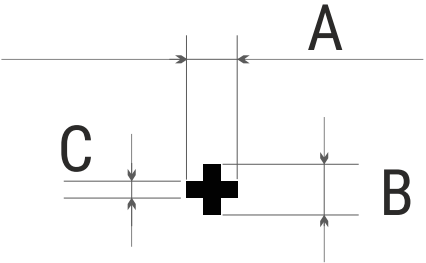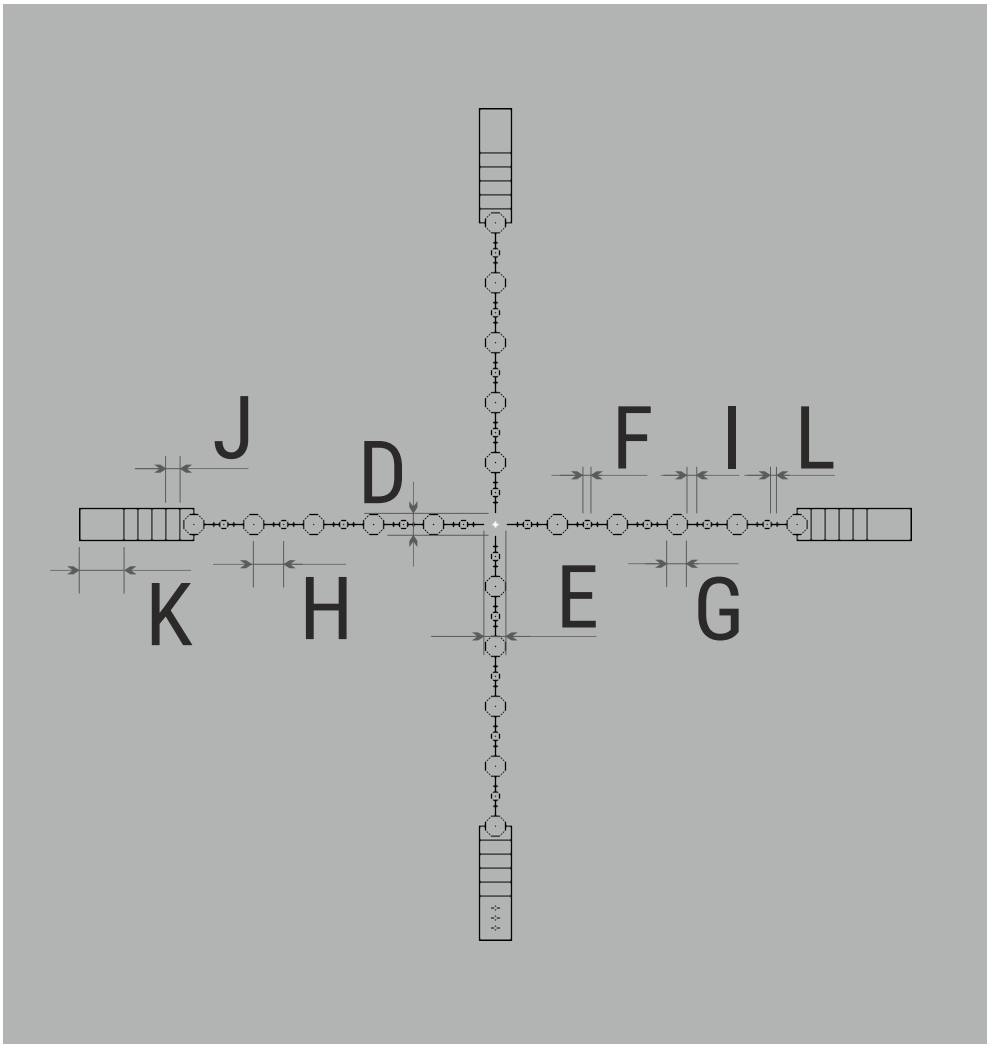



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 7.7 / 22.4       |
| Section E          | 7.7 / 22.4       |
| Section F          | 3.5 / 10.2       |
| Section G          | 7.7 / 22.4       |
| Section H          | 10.5 / 30.5      |
| Section I          | 3.5 / 10.2       |
| Section J          | 4.9 / 14.3       |
| Section K          | 15.4 / 44.8      |
| Section L          | 2.1 / 6.1        |

# M52i

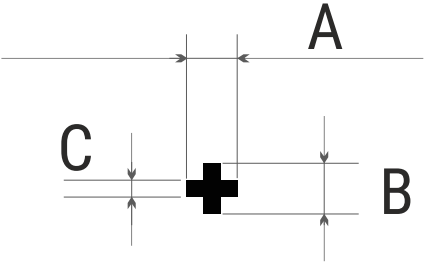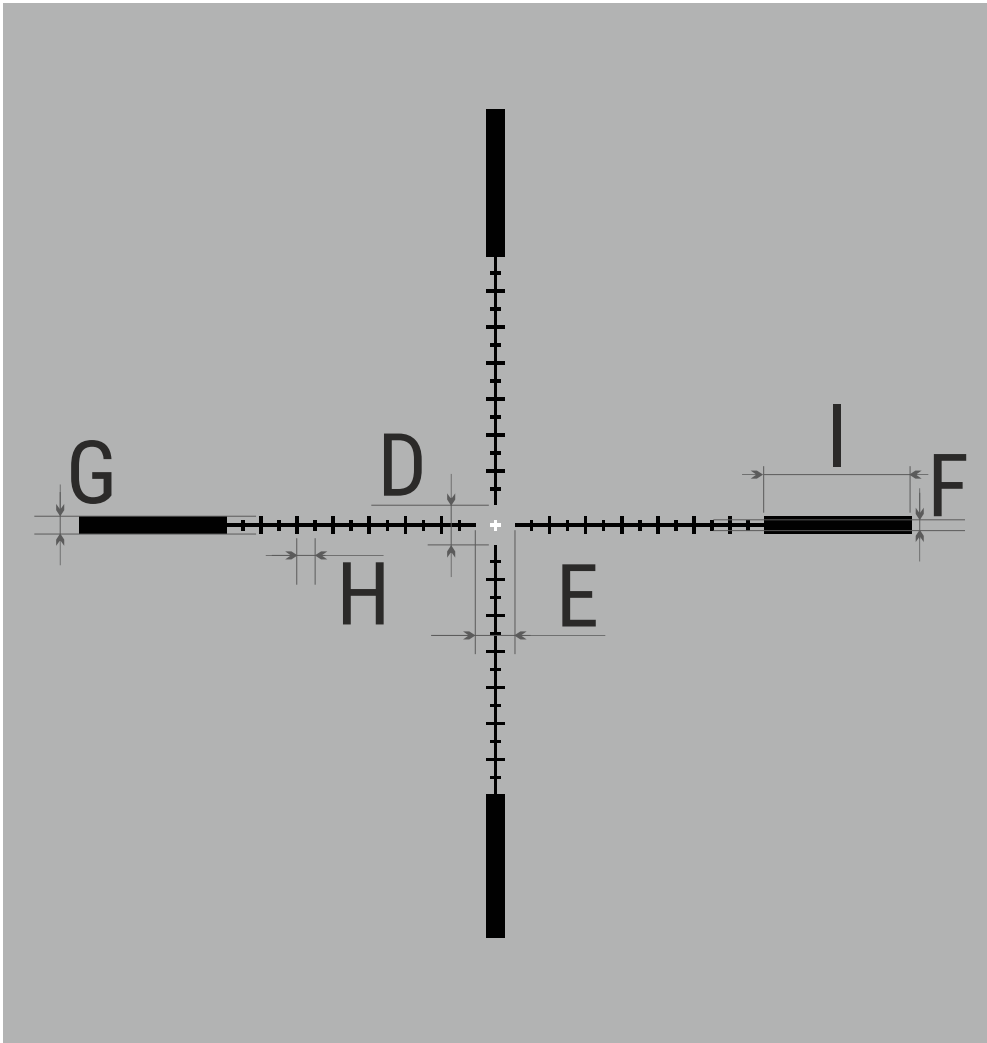



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 7.7 / 22.4       |
| Section E          | 7.7 / 22.4       |
| Section F          | 2.1 / 6.1        |
| Section G          | 3.5 / 10.2       |
| Section H          | 3.5 / 10.2       |
| Section I          | 28.7 / 83.5      |

# M54i

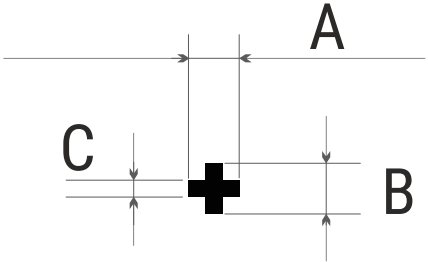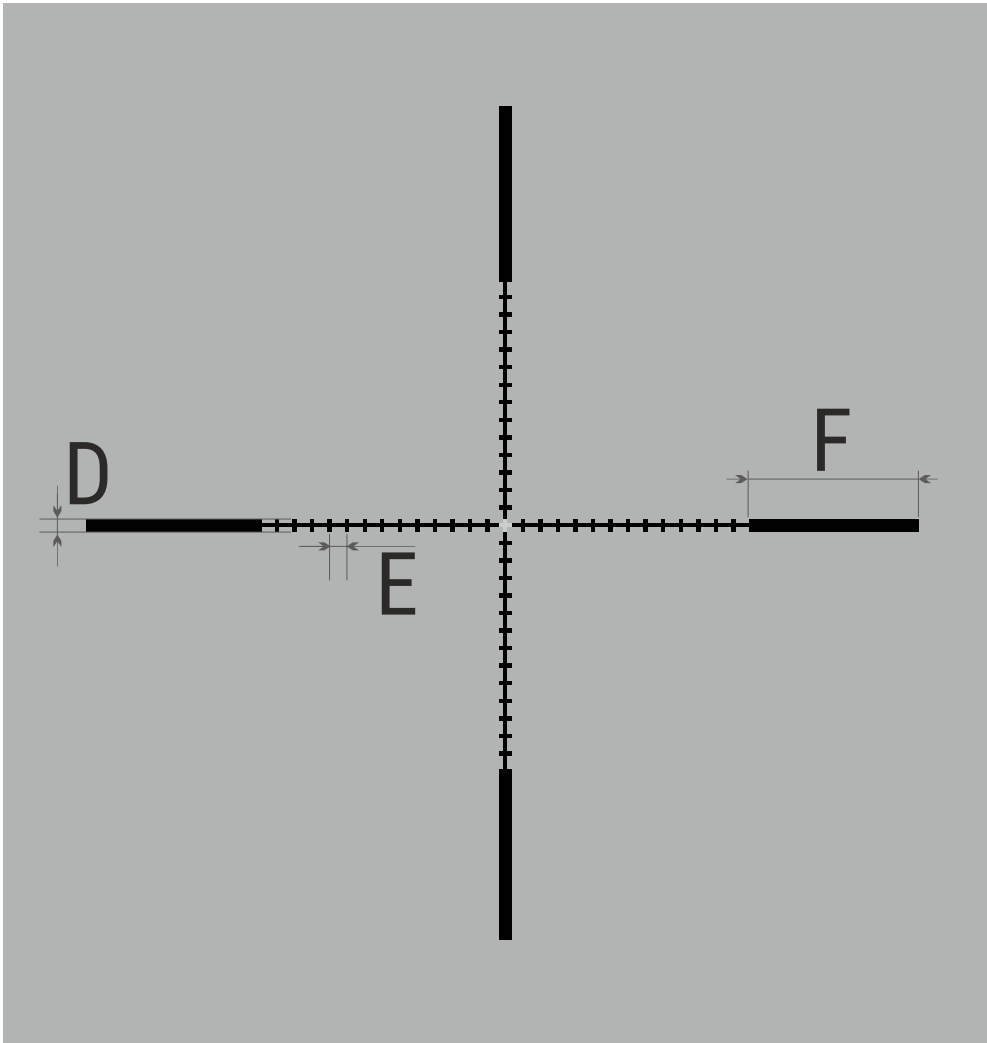



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 2.1 / 6.1        |
| Section E          | 3.5 / 10.2       |
| Section F          | 28.7 / 83.5      |

# T50i

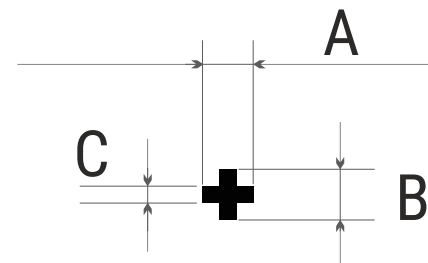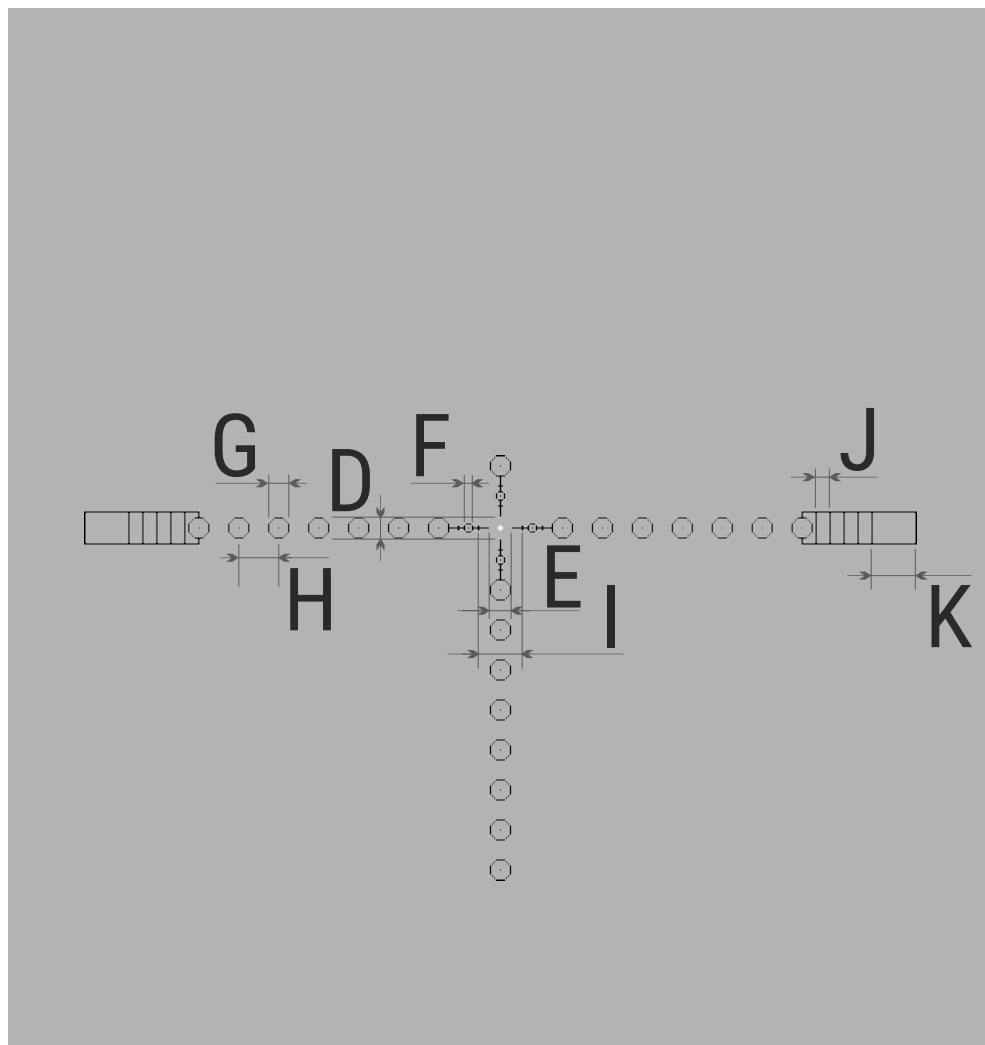



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 7.7 / 22.4       |
| Section E          | 7.7 / 22.4       |
| Section F          | 3.5 / 10.2       |
| Section G          | 7.7 / 22.4       |
| Section H          | 14 / 40.7        |
| Section I          | 15.4 / 44.8      |
| Section J          | 4.9 / 14.3       |
| Section K          | 15.4 / 44.8      |

# T51AI

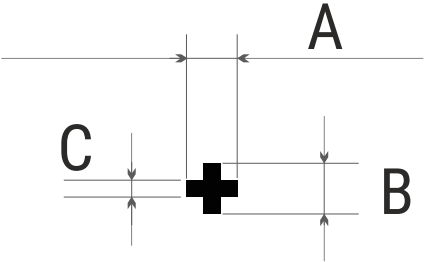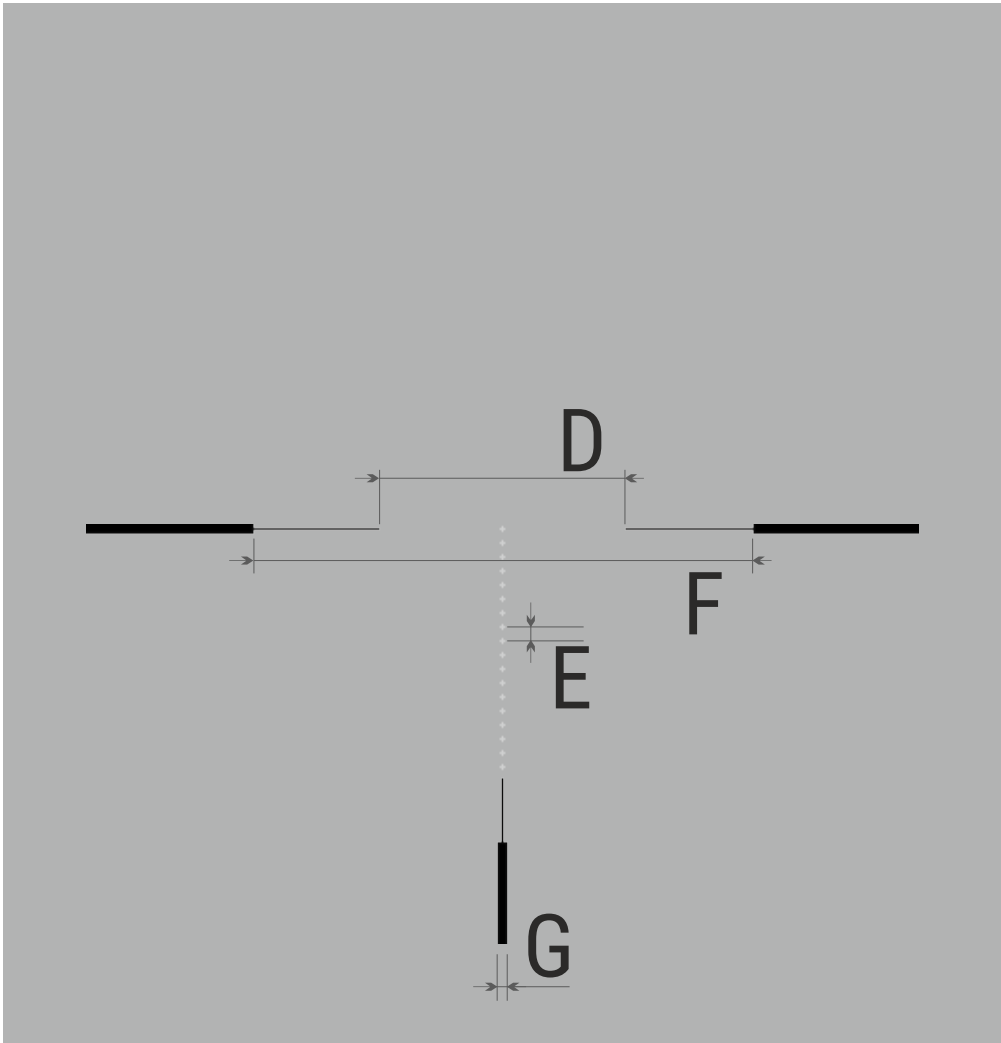

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 86.1 / 250.4     |
| Section E          | 7.0 / 20.4       |
| Section F          | 174.9 / 509      |
| Section G          | 3.5 / 10.2       |



# T52i

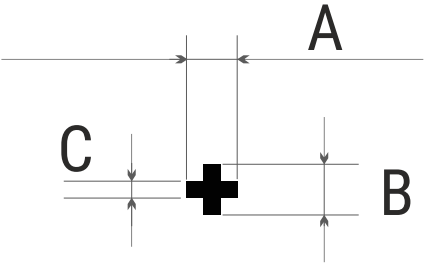

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 13.3 / 38.7      |
| Section E          | 6.3 / 18.3       |





# X50i

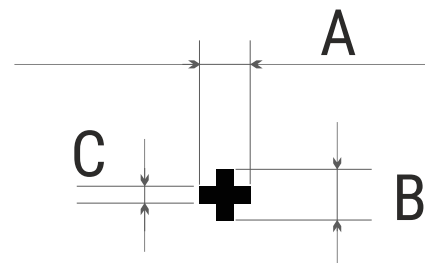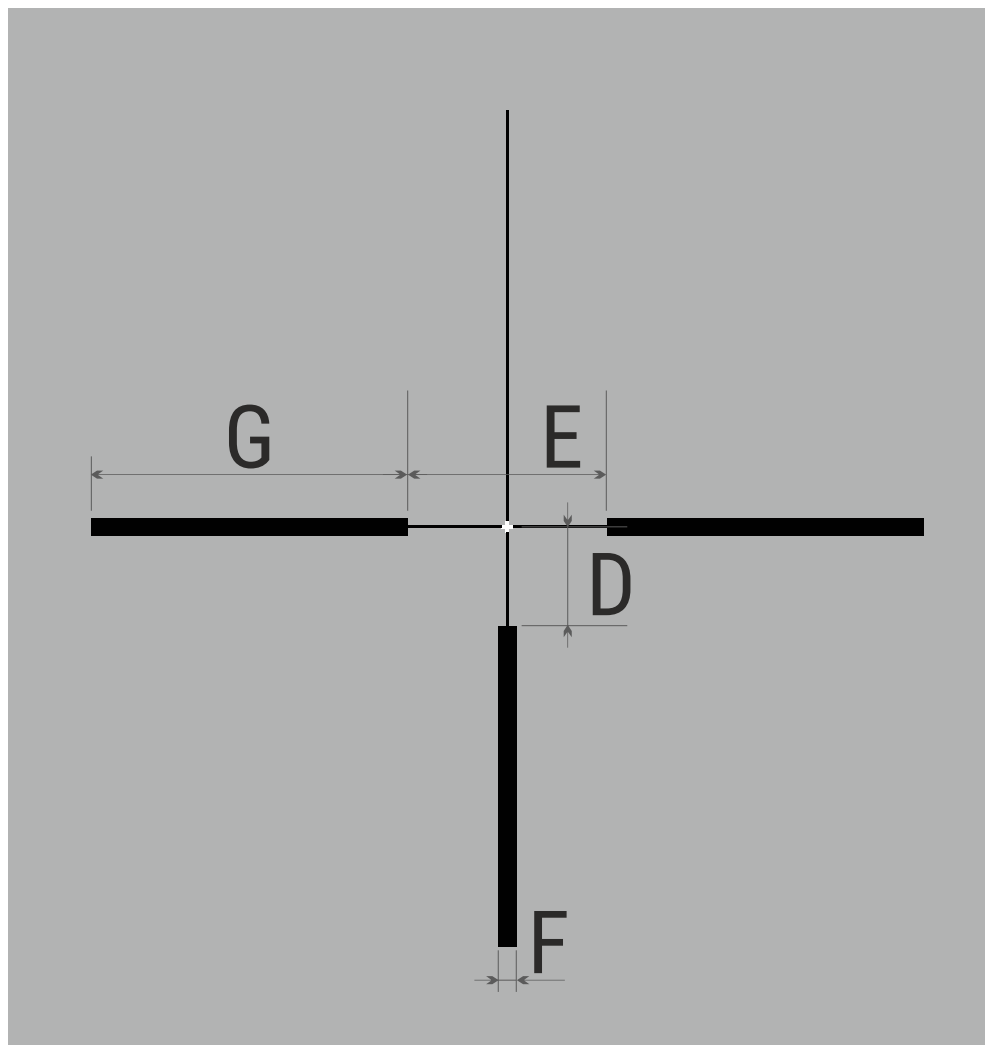



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 19.6 / 57        |
| Section E          | 38.5 / 112       |
| Section F          | 3.5 / 10.2       |
| Section G          | 61.6 / 179.2     |

# X51i (X51i-150)

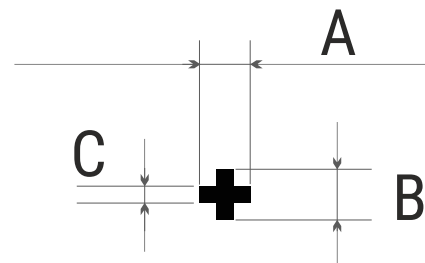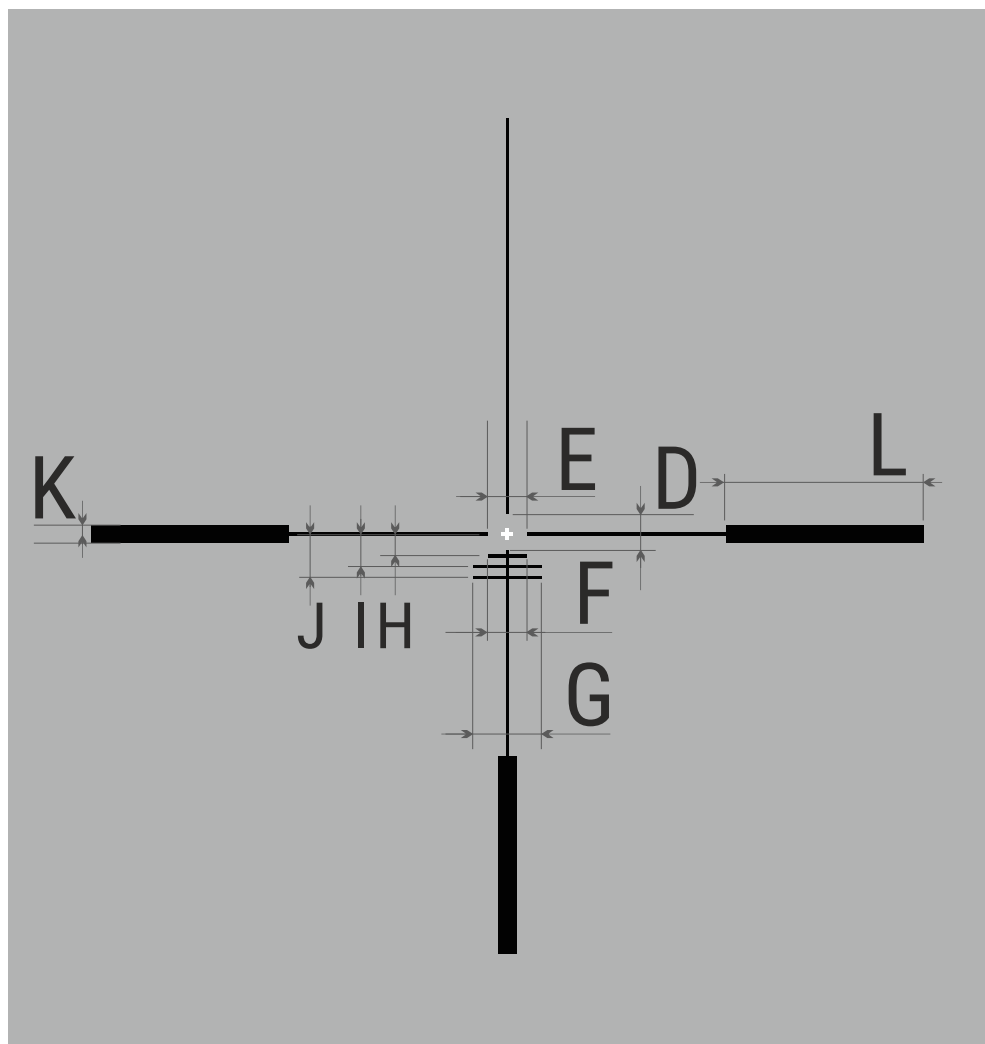



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 7.7 / 22.4       |
| Section E          | 7.7 / 22.4       |
| Section F          | 9.1 / 26.5       |
| Section G          | 17.5 / 50.9      |
| Section H          | 6.3 / 18.3       |
| Section I          | 9.1 / 26.5       |
| Section J          | 12.6 / 36.6      |
| Section K          | 3.5 / 10.2       |
| Section L          | 38.5 / 112       |

# X52i

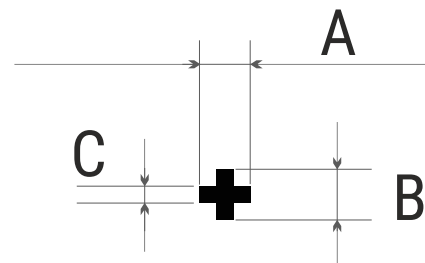



| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |

# X53i

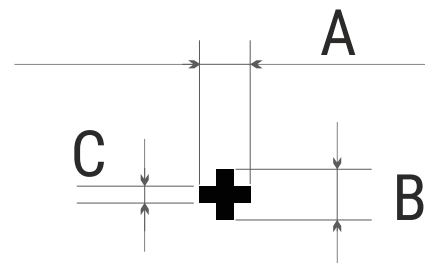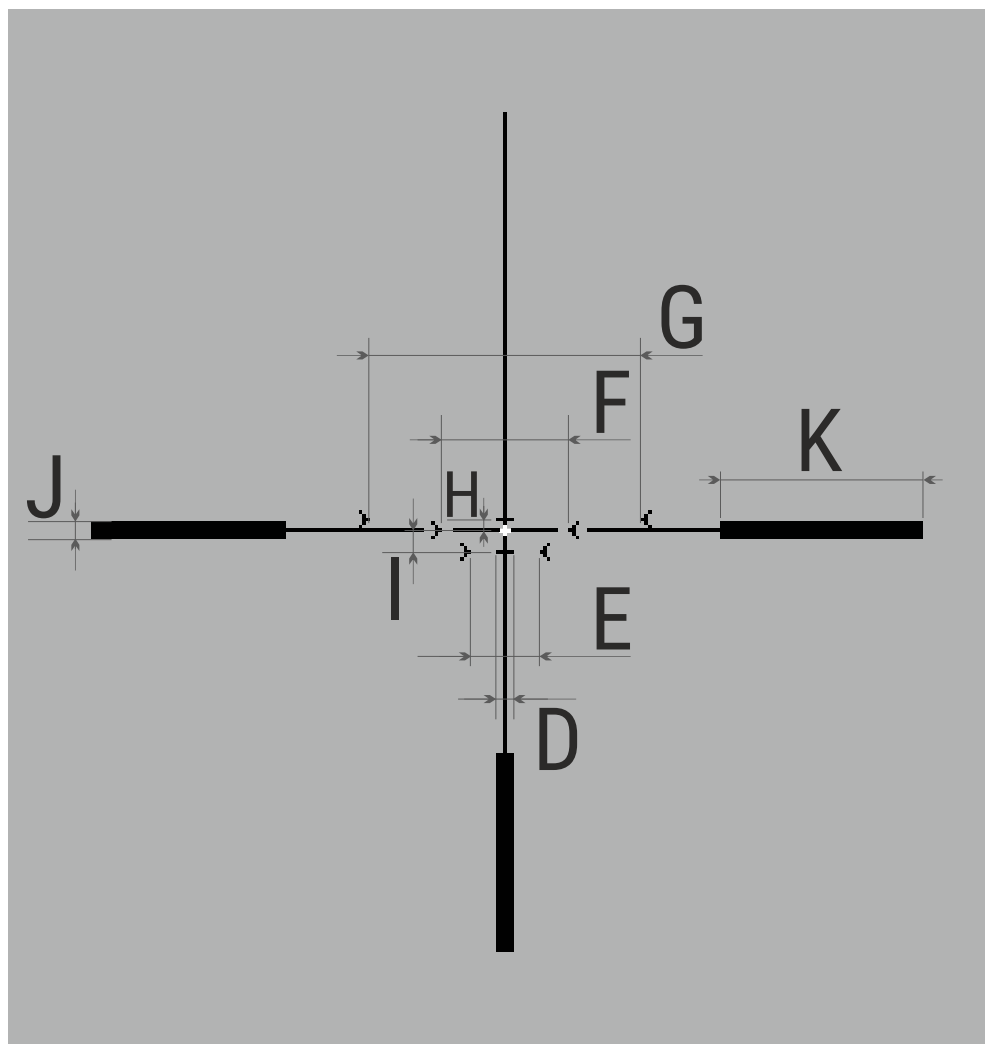

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 4.9 / 14.3       |
| Section E          | 17.5 / 50.9      |
| Section F          | 34.3 / 99.8      |
| Section G          | 70.7 / 205.6     |
| Section H          | 3.5 / 10.2       |
| Section I          | 6.3 / 18.3       |
| Section J          | 3.5 / 10.2       |
| Section K          | 37.8 / 109.9     |

# X54i

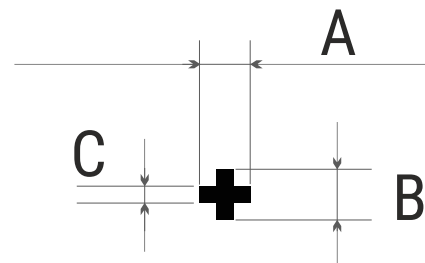

| Reticle parameters | MOA / cm @ 100 m |
|--------------------|------------------|
| Section A          | 2.1 / 6.1        |
| Section B          | 2.1 / 6.1        |
| Section C          | 0.7 / 2.0        |
| Section D          | 15.5 / 50.9      |